

MRV416

Receiving Card



Specifications

Change History

Document Version	Release Date	Description
V1.0.5	2023-12-30	Updated feature descriptions.
V1.0.4	2022-12-27	<ul style="list-style-type: none"> • Updated the description of the maximum resolution. • Updated the dimensions diagram. • Deleted the dual backup of configuration parameters.
V1.0.3	2022-08-31	<ul style="list-style-type: none"> • Added the table of appearance description. • Added the dimensions diagram description. • Updated the appearance diagram. • Updated the input voltage. • Updated the packing information.
V1.0.2	2021-12-03	<ul style="list-style-type: none"> • Updated the certification description. • Updated the description of features.
V1.0.1	2021-05-28	Added the certification related description.
V1.0.0	2021-05-19	First release

Introduction

The MRV416 is a general receiving card developed by Xi'an NovaStar Tech Co., Ltd. (hereinafter referred to as NovaStar). For PWM driver ICs, a single MRV416 supports resolutions up to 512×384@60Hz. For common driver ICs, a single MRV416 supports resolutions up to 384×384@60Hz. Supporting various functions such as the brightness calibration, 3D, and individual Gamma adjustment for RGB, and quick seam correction, the MRV416 can greatly improve the display effect and user experience.

The MRV416 uses 16 standard HUB75E connectors for communication, resulting in high stability. It supports up to 32 groups of parallel RGB data and is suitable for various on-site setups.

Certifications

RoHS, EMC Class A

If the product does not have the relevant certifications required by the countries or regions where it is to be sold, please contact NovaStar to confirm or address the problem. Otherwise, the customer shall be responsible for the legal risks caused or NovaStar has the right to claim compensation.

Features

Improvements to Display Effect

- **Brightness calibration**
Work with the high-precision calibration system to perform brightness calibration on each LED to effectively remove brightness differences, enabling high brightness consistency.
- **3D**
Working with the LED controller that supports 3D function, the receiving card supports 3D output.
- **Individual Gamma adjustment for RGB**
Working with NovaLCT (V5.2.0 or later) and the LED controller that supports this function, the receiving card supports individual adjustment of red Gamma, green Gamma and blue Gamma, which can effectively control image non-uniformity under low grayscale and white balance offset, allowing for a more realistic image.

- Quick seam correction
The dark or bright lines caused by splicing of modules or cabinets can be adjusted to improve the visual experience. The adjustment can be easily made and takes effect immediately.

Improvements to Maintainability

- Quick uploading of calibration coefficients
Upload the calibration coefficients quickly to the receiving cards to improve efficiency.
- Mapping 1.0
The cabinets can display the receiving card number and Ethernet port information, allowing users to easily obtain the locations and connection topology of receiving cards.
- Setting of a pre-stored image in receiving card
The image displayed on the screen during startup, or displayed when the Ethernet cable is disconnected or there is no video signal can be customized.
- Temperature and voltage monitoring
The receiving card temperature and voltage can be monitored without using peripherals.


- Cabinet LCD
The LCD module of the cabinet can display the temperature, voltage, single run time and total run time of the receiving card.
- Bite error detection
The Ethernet port communication quality of the receiving card can be monitored and the number of erroneous packets can be recorded to help troubleshoot network communication problems.
- Firmware program readback
The receiving card firmware program can be read back and saved to the local computer.
- Configuration parameter readback
The receiving card configuration parameters can be read back and saved to the local computer.

Improvements to Reliability

- Loop backup
The receiving card and LED controller form a loop via the main and backup line connections. If a fault occurs at a location of the lines, the screen can still display the image normally.

- Dual program backup
Two copies of firmware program are stored in the receiving card at the factory to avoid the problem that the receiving card may get stuck abnormally during program update.

Appearance

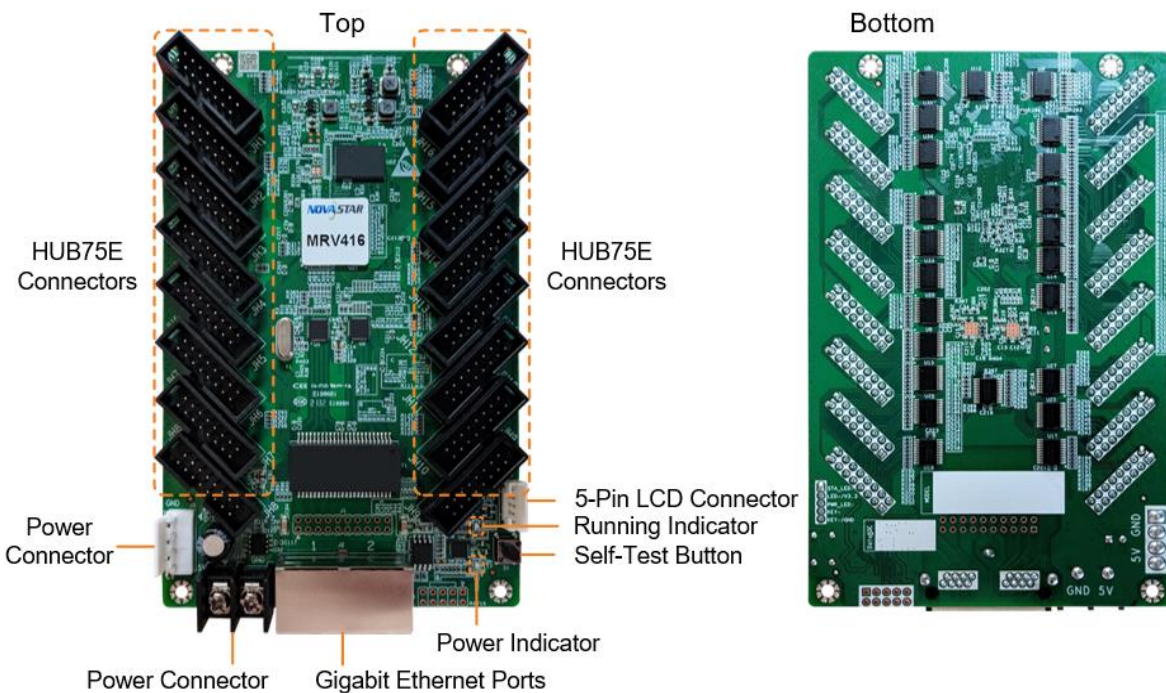

All product pictures shown in this document are for illustration purpose only. Actual product may vary.


Name	Description
HUB75E Connectors	Connect to the module.
Power Connector	Connect to the input power. Either of the connectors can be chosen.
Gigabit Ethernet Ports	Connect to the sending card, and cascade other receiving cards. Each connector can be used as input or output.
Self-Test Button	Set the test pattern. After the Ethernet cable is disconnected, press the button twice, and the test pattern will be displayed on the screen. Press the button again to switch the pattern.
5-Pin LCD Connector	Connect to the LCD.

Indicators

Indicator	Color	Status	Description
Running indicator	Green	Flashing once every 1s	The receiving card is functioning normally. Ethernet cable connection is normal, and video source input is available.
		Flashing once every 3s	Ethernet cable connection is abnormal.
		Flashing 3 times every 0.5s	Ethernet cable connection is normal, but no video source input is available.
		Flashing once every 0.2s	The receiving card failed to load the program in the application area and is now using the backup program.
		Flashing 8 times every 0.5s	A redundancy switchover occurred on the Ethernet port and the loop backup has taken effect.
Power indicator	Red	Always on	The power input is normal.

Dimensions

The board thickness is not greater than 2.0 mm, and the total thickness (board thickness + thickness of components on the top and bottom sides) is not greater than 19.0 mm.

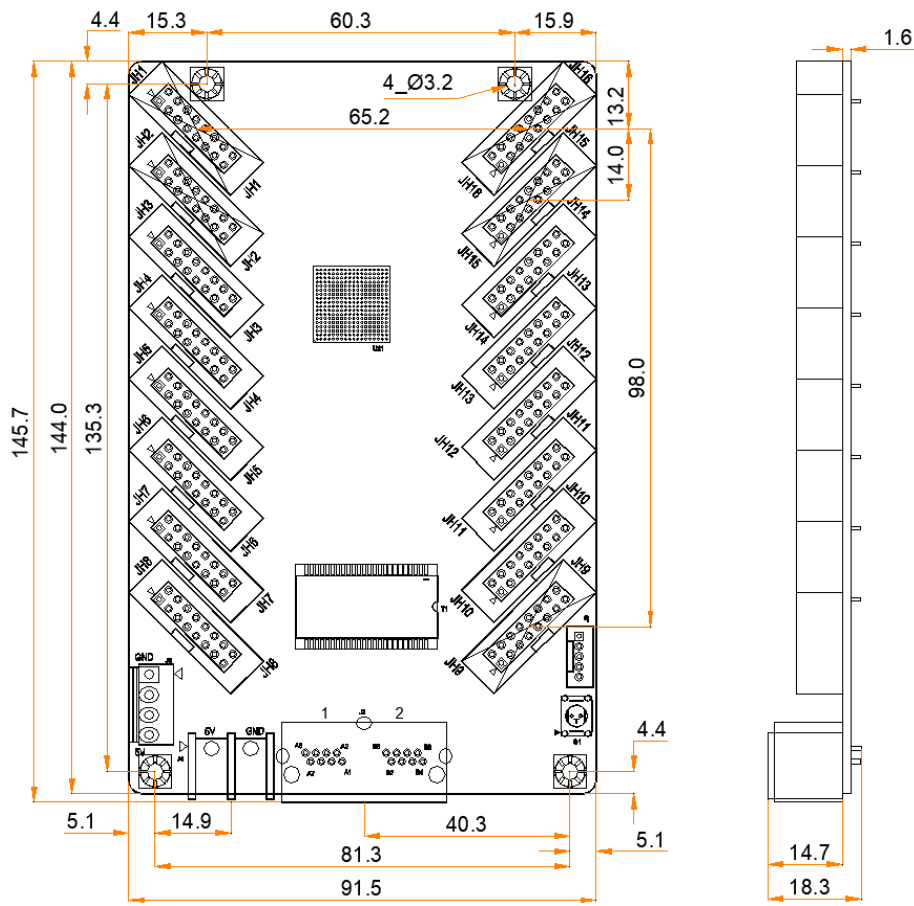

Tolerance: ± 0.3 Unit: mm

To make molds or trepan mounting holes, please contact NovaStar for a higher-precision structural drawing.

Pins

R1	1	2	G1
B1	3	4	GND
R2	5	6	G2
B2	7	8	HE1
HA1	9	10	HB1
HC1	11	12	HD1
HDCLK1	13	14	HLAT1
HOE1	15	16	GND

PBT-2.54MM H8.8MM DIP

R3	1	2	G3
B3	3	4	GND
R4	5	6	G4
B4	7	8	HE15
HA15	9	10	HB15
HC15	11	12	HD15
HDCLK2	13	14	HLAT2
HOE2	15	16	GND

PBT-2.54MM H8.8MM DIP

R5	1	2	G5
B5	3	4	GND
R6	5	6	G6
B6	7	8	HE2
HA2	9	10	HB2
HC2	11	12	HD2
HDCLK3	13	14	HLAT3
HOE3	15	16	GND

PBT-2.54MM H8.8MM DIP

R7	1	2	G7
B7	3	4	GND
R8	5	6	G8
B8	7	8	HE16
HA16	9	10	HB16
HC16	11	12	HD16
HDCLK4	13	14	HLAT4
HOE4	15	16	GND

PBT-2.54MM H8.8MM DIP

R9	1	2	G9
B9	3	4	GND
R10	5	6	G10
B10	7	8	HE3
HA3	9	10	HB3
HC3	11	12	HD3
HDCLK5	13	14	HLAT5
HOE5	15	16	GND

PBT-2.54MM H8.8MM DIP

R11	1	2	G11
B11	3	4	GND
R12	5	6	G12
B12	7	8	HE11
HA11	9	10	HB11
HC11	11	12	HD11
HDCLK6	13	14	HLAT6
HOE6	15	16	GND

PBT-2.54MM H8.8MM DIP

R13	1	2	G13
B13	3	4	GND
R14	5	6	G14
B14	7	8	HE4
HA4	9	10	HB4
HC4	11	12	HD4
HDCLK7	13	14	HLAT7
HOE7	15	16	GND

PBT-2.54MM H8.8MM DIP

R15	1	2	G15
B15	3	4	GND
R16	5	6	G16
B16	7	8	HE12
HA12	9	10	HB12
HC12	11	12	HD12
HDCLK8	13	14	HLAT8
HOE8	15	16	GND

PBT-2.54MM H8.8MM DIP

R17	1	2	G17
B17	3	4	GND
R18	5	6	G18
B18	7	8	HE5
HA5	9	10	HB5
HC5	11	12	HD5
HDCLK9	13	14	HLAT9
HOE9	15	16	GND

PBT-2.54MM H8.8MM DIP

R19	1	2	G19
B19	3	4	GND
R20	5	6	G20
B20	7	8	HE13
HA13	9	10	HB13
HC13	11	12	HD13
HDCLK10	13	14	HLAT10
HOE10	15	16	GND

PBT-2.54MM H8.8MM DIP

R21	1	2	G21
B21	3	4	GND
R22	5	6	G22
B22	7	8	HE6
HA6	9	10	HB6
HC6	11	12	HD6
HDCLK11	13	14	HLAT11
HOE11	15	16	GND

PBT-2.54MM H8.8MM DIP

R23	1	2	G23
B23	3	4	GND
R24	5	6	G24
B24	7	8	HE14
HA14	9	10	HB14
HC14	11	12	HD14
HDCLK12	13	14	HLAT12
HOE12	15	16	GND

PBT-2.54MM H8.8MM DIP

R25	1	2	G25
B25	3	4	GND
R26	5	6	G26
B26	7	8	HE7
HA7	9	10	HB7
HC7	11	12	HD7
HDCLK13	13	14	HLAT13
HOE13	15	16	GND

PBT-2.54MM H8.8MM DIP

R27	1	2	G27
B27	3	4	GND
R28	5	6	G28
B28	7	8	HE9
HA9	9	10	HB9
HC9	11	12	HD9
HDCLK14	13	14	HLAT14
HOE14	15	16	GND

PBT-2.54MM H8.8MM DIP

R29	1	2	G29
B29	3	4	GND
R30	5	6	G30
B30	7	8	HE8
HA8	9	10	HB8
HC8	11	12	HD8
HDCLK15	13	14	HLAT15
HOE15	15	16	GND

PBT-2.54MM H8.8MM DIP

R31	1	2	G31
B31	3	4	GND
R32	5	6	G32
B32	7	8	HE10
HA10	9	10	HB10
HC10	11	12	HD10
HDCLK16	13	14	HLAT16
HOE16	15	16	GND

PBT-2.54MM H8.8MM DIP

Pin Definitions (Take JH1 as an example)					
/	R1	1	2	G1	/
/	B1	3	4	GND	Ground
/	R2	5	6	G2	/
Line decoding signal	B2	7	8	HE1	Line decoding signal
	HA1	9	10	HB1	
Shift clock	HC1	11	12	HD1	
Display enable signal	HDCLK1	13	14	HLAT1	Latch signal
	HOE1	15	16	GND	Ground

Specifications

Maximum Resolution	512×384@60Hz (PWM driver ICs) 384×384@60Hz (Common driver ICs)	
Electrical Specifications	Input voltage	DC 3.8 V to 5.5 V
	Rated current	0.5 A
	Rated power consumption	2.5 W
Operating Environment	Temperature	−20°C to +70°C
	Humidity	10% RH to 90% RH, non-condensing
Storage Environment	Temperature	−25°C to +125°C
	Humidity	0% RH to 95% RH, non-condensing
Physical Specifications	Dimensions	145.7 mm × 91.5 mm × 18.3 mm
	Net weight	101.9 g Note: It is the weight of a single receiving card only.
Packing Information	Packing specifications	Each receiving card is packaged in a blister pack. Each packing box contains 100 receiving cards.
	Packing box dimensions	625.0 mm × 180.0 mm × 470.0 mm

The amount of current and power consumption may vary depending on factors such as product settings, usage, and environment.

Copyright © 2023 Xi'an NovaStar Tech Co., Ltd. All Rights Reserved.

No part of this document may be copied, reproduced, extracted or transmitted in any form or by any means without the prior written consent of Xi'an NovaStar Tech Co., Ltd.

Trademark

 is a trademark of Xi'an NovaStar Tech Co., Ltd.

Statement

Thank you for choosing NovaStar's product. This document is intended to help you understand and use the product. For accuracy and reliability, NovaStar may make improvements and/or changes to this document at any time and without notice. If you experience any problems in use or have any suggestions, please contact us via the contact information given in this document. We will do our best to solve any issues, as well as evaluate and implement any suggestions.

| [Official website](http://www.novastar.tech)
| www.novastar.tech

| [Technical support](mailto:support@novastar.tech)
| support@novastar.tech