

①: Power switch.


②: Operation screen

③: Knob. To press knob means Enter or OK, rotating knob represents selection or adjustment.


④: ESC. Escape current operation or selection.

⑤: SCALE. Auto fit mode turn-on/turn-off. The lighting of this key represents the turn-on of zoom function; otherwise, zoom function is unavailable.

1. After starting the controller, the main interface of the *Operation screen* is as follows:

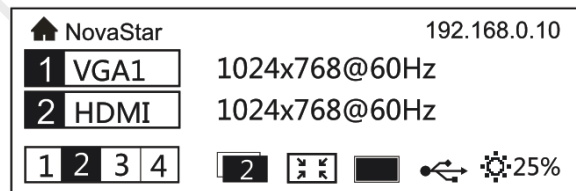


2. Press the *Knob* to enter to the main menu.

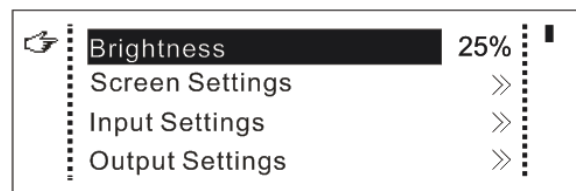


3. Rotate the *Knob* to select the *Output Settings* and then press the *Knob* to


enter the Submenu of *Output Settings*.

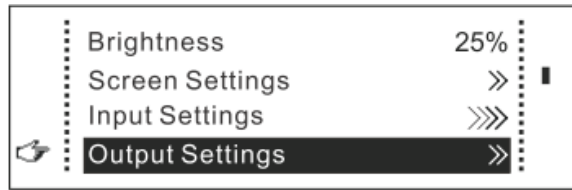

4. Enable the *Scaling* and Enable the *Auto Fit*, then the input contents will be fully zoomed to the size of LED Screen, and the input contents will be adaptive to adapt to the size of LED Screen. This mode is suitable for full-screen play of the contents.

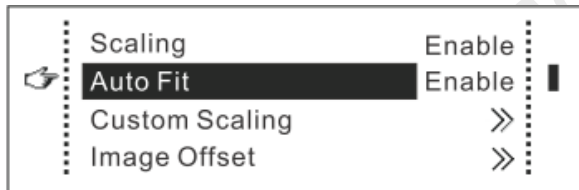

5. Press the *ESC* to return to the main interface.

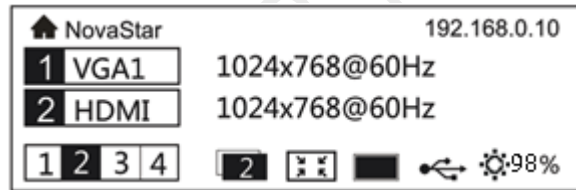

6. *Scale* button, a shortcut key for switching on/off *Auto Fit* mode.

